




ART. 175 FLANGIA PROFILATA

PROFILED FLANGE

BRIDA PERFILADA

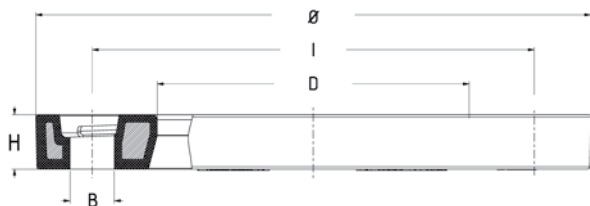

MATERIALI Anima in ghisa sferoidale GJS-500-7

Rivestimento esterno polipropilene caricato a vetro PP-GF30

MATERIALS Spheroidal cast iron core GJS-500-7

External coating in glass-fiber reinforced polypropylene PP-GF30

MATERIALES Núcleo en fundición esferoidal GJS-500-7

Revestimiento en polipropileno cargado con vidrio PP-GF30

16 BAR



DIMENSIONI GENERALI SECONDO ISO 15494 - FORI DI CONNESSIONE PN10/16 SECONDO ISO 7005 / EN 1092
GENERAL DIMENSIONS ACCORDING TO ISO 15494 - CONNECTING HOLES PN10/16 ACCORDING TO ISO 7005 / EN 1092
DIMENSIONALES SEGÚN UNI EN ISO 15494 - AGUJEROS DE CONEXIÓN PN10/16 SEGÚN ISO 7005 / EN 1092

COD	DE	DN	PN	€	Ø	I	D	H	B	Nr Viti	Kg	Conf.
1756050040	50	40	10/16	9,84	155	110	67	19	M16	4	0,70	16
1756063050	63	50	10/16	9,89	170	125	78	20	M16	4	0,90	8
1756075065	75	65	10/16	13,77	191	145	92	21	M16	4	1,25	10
1756090080	90	80	10/16	12,90	206	160	108	21	M16	8	1,30	6
1756110100	110	100	10/16	16,35	226	180	127	22	M16	8	1,55	8
1756125100	125	100	10/16	15,60	226	180	134	23	M16	8	1,40	8
1756140125	140	125	10/16	19,18	256	210	158	25	M16	8	1,70	8
1756160150	160	150	10/16	25,62	291	240	178	28	M20	8	2,50	7
1756180150	180	150	10/16	23,80	291	240	186	27	M20	8	2,40	7
1754200200	200	200	10	35,35	346	295	238	32	M20	8	3,50	*
1754225200	225	200	10	36,93	346	295	238	32	M20	8	3,50	*
1754250250	250	250	10	56,18	405	350	288	36	M20	12	4,90	*
1754280250	280	250	10	50,57	405	350	294	35	M20	12	4,40	*
1754315300	315	300	10	62,42	456	400	337	42	M20	12	7,50	*
1756200200	200	200	16	41,33	346	295	238	32	M20	12	3,40	*
1756225200	225	200	16	41,33	346	295	238	32	M20	12	3,40	*
1756250250	250	250	16	59,14	410	355	288	36	M24	12	5,50	*
1756280250	280	250	16	59,14	410	355	294	35	M24	12	5,00	*
1756315300	315	300	16	86,21	465	410	337	42	M24	12	8,80	*

A RICHIESTA DIAMETRI SUPERIORI | BIGGER SIZES ON REQUEST | A PETICIÓN MEDICIONES ALTO

Conf. | Pack | Paquete - Viti | Bolts | Pernos